

Large Square Industrial Kiosk

Dimensions: 1750 × 1750 × 550 mm

Description: Heavy-duty GRP enclosure designed for industrial applications, pump stations, and multi-service utilities.

The F6 Large Square Industrial Kiosk is engineered for maximum strength, security, and longevity in the most challenging operational environments. Its expansive 1750 × 1750 mm footprint and 550 mm depth provide a generous internal volume, making it perfect for large control systems, pump stations, or multi-service utilities.

Built from 450gsm GRP fibreglass, the F6 delivers superior impact resistance against vandalism, accidental damage, and harsh weather conditions. This robust outer shell is paired with a 12mm CE-marked ALPHAPLY plywood structural floor, designed to carry the weight of heavy-duty equipment without compromising stability. The exterior is finished with BS226 Green marine-grade Crystic® gelcoat, protecting against UV degradation, moisture ingress, and industrial pollutants. A full Scapa foam tape seal ensures that dust, water, and debris stay out, maintaining a clean and safe operating environment.

Security is a core feature of the F6, with a Yale 77 nightlatch, stainless steel slide latch, and heavy-duty ZOO stainless steel hinges ensuring reliable access control. This combination of strength, capacity, and protection makes the F6 the proven choice for UK water utilities, manufacturing facilities, and public infrastructure projects.



Specifications

- 300gsm Chopped Strand Mat – M705
- 450gsm Chopped Strand Mat – M705
- 600gsm Chopped Strand Mat – M705
- Plywood Panel – 3mm External Grade
- Plywood Panel – 18mm External Grade
- Polyester Gelcoat – SB 2161 Green (BS226)
- CrysticROOF Resin – GRP lamination matrix
- Scapa 3259 Black Single-Sided Foam Tape – 3mm
- Yale 77 Traditional Nightlatch
- 10mm Spring Bolt – Zinc Plated Steel
- ZOO ZHSS232 Stainless Steel Hinges

Contact us:



Imex Enterprise Park
Unit C2, Wigwam Lane, Hucknall,
Nottingham, NG157SZ



sales@grpkiiosk4you.co.uk



www.grpkiiosk4you.co.uk

Specifications

10mm Spring Bolt – Steel, Zinc Plated

The 10mm spring-loaded bolt, also known as a shoot bolt or truck brake bolt, is a robust mechanical fastener designed for secure and reliable locking. Its built-in spring mechanism ensures smooth and quick engagement or release with a simple 90-degree turn. The bright zinc plated finish offers corrosion resistance, making it suitable for both indoor and outdoor GRP kiosk applications.

Specification:

- Bolt Diameter: 10 mm
- Material: High-quality steel
- Finish: Bright Zinc Plated (BZP) for corrosion resistance
- Locking Function: 90-degree locking position with stay-open notch
- Mounting Plate: Pre-drilled 6.5 mm holes (for M6 bolts or 1/4" fasteners)
- Mechanism: Spring-loaded for smooth operation
- Weight: 0.20 kg

Key Benefits:

- Provides strong additional locking for kiosk doors or compartments
- Quick-release operation with smooth spring retraction
- Stay-open notch prevents accidental engagement
- Heavy-duty design suitable for repeated use
- Corrosion-resistant finish for outdoor environments

Yale 77 Traditional Nightlatch

The Yale No. 77 Traditional Nightlatch is a reliable and secure locking system for GRP kiosk doors. The latchbolt can be withdrawn from the inside using a knob or from the outside using a key. It features a slide button for deadlocking or holding back the bolt from the inside it can also be easily reversed on-site for outward-opening doors.

Specification:

- Mechanism: 5-pin cylinder
- Cylinder Finish: Polished brass or satin chrome
- Case Finish: Green
- Keys Supplied: 2 per lock
- Door Thickness Range: 32 mm – 57 mm
- Guarantee: 2 years
- Keying Options:
 - Individually keyed (standard) – each lock has its own keys
 - Keyed alike – all locks use the same key

Key Benefits:

- Provides reliable security for kiosk access points
- Deadlock function for added protection
- Reversible latchbolt for flexible door installation
- Durable materials suitable for long-term use
- Supplied with two keys as standard

Specifications

18mm Chinese Eucalyptus Face Poplar Core External Grade Plywood

A robust, heavy-duty plywood sheet with a eucalyptus face veneer and poplar core, designed for use in flooring, walls, and roof sections of GRP kiosks. It is CE2+ certified, compliant with BS-EN636 Class 2, and suitable for humid interior or covered exterior applications.

Specification:

- Size: 2440 × 1220 mm
- Thickness: 18 mm
- Weight: 31 kg
- Grade: B/BB
- Standard: CE2+
- Class: BS-EN636 Class 2 (humid interior/covered exterior)
- Number of Layers: 11
- Finish: Smooth sanded veneer, light reddish colour
- Edging: Square
- Fire Rating: None
- Formaldehyde Level: E1 (low emission)
- Moisture Resistance: No
- Wood Species: Poplar core
- Country of Origin: China
- Brand: AlphaPly

Key Benefits:

- Strong structural performance for flooring and heavy load areas
- CE-certified for humid and covered environments
- Smooth finish for easy painting or sealing
- Environmentally safer low formaldehyde emissions
- Multiple veneer layers for enhanced stability and durability

Polyester Gelcoat – SB 2161 Green (BS226)

Crystic® Gelcoat GT-600 is a high-performance isophthalic polyester gelcoat pre-accelerated and formulated for brush application.

It delivers a durable BS226 green finish with excellent intrinsic water and weather resistance making it ideal for outdoor GRP kiosk use. Its viscosity ensures even coverage low drainage and minimal film porosity, maintaining both protection and aesthetics over time.

Specification:

- Type: Isophthalic polyester gelcoat
- Colour: BS226 Green
- Application Method: Brush
- Coverage: Even film with minimal porosity
- Industry Approvals: Lloyd's Register of Shipping
- Typical Use: Marine, building, transport, and general GRP moulding
- Packaging: 1 kg, 3 kg, 5 kg, 20 kg
- Storage: Under 25°C, airtight, out of sunlight
- Shelf Life: 5 months from production

Key Benefits:

- Excellent water and weather resistance for long-term outdoor use
- High-quality decorative finish in BS226 green
- Approved for marine-grade applications
- Easy application with controlled viscosity
- Custom colour matching available via GelTint technology

Specifications

CrysticROOF Resin

CrysticROOF Resin is a low styrene emission, pre-accelerated orthophthalic polyester resin designed for hand lamination with chopped strand mat in GRP construction. It offers rapid wet-out, strong mechanical performance, and reliable curing making it an ideal bonding matrix for kiosk fibreglass structures.

Specification:

- Resin Type: Orthophthalic polyester
- Appearance: Greenish blue
- Viscosity at 25°C: Thixotropic
- Specific Gravity: 1.12
- Volatile Content: 43%
- Catalyst: Catalyst M (Butanox M50) – 1% standard addition
- Pot Life at 25°C: 17 minutes
- Storage Stability: 5 months at 20°C in sealed containers
- Packaging: 20 kg and 225 kg containers

Mechanical Properties – Fully Cured (Unfilled Casting):

- Barcol Hardness: 42
- Deflection Temperature (1.80 MPa): 67°C
- Water Absorption (24h, 23°C): 15 mg
- Tensile Strength: 50 MPa
- Tensile Modulus: 3800 MPa
- Elongation at Break: 1.5%

Mechanical Properties – 450g/m² CSM Laminate:

- Tensile Strength: 98 MPa
- Tensile Modulus: 7600 MPa
- Flexural Strength: 190 MPa
- Flexural Modulus: 7400 MPa
- Elongation at Break: 1.7%

- **Key Benefits:**
- Low styrene emission for improved workplace safety
- Fast wet-out and strong adhesion with glass fibre reinforcement
- Reliable cure even at cooler ambient temperatures with adjusted catalyst levels
- Excellent mechanical strength in laminates
- Suitable for outdoor, structural kiosk applications

Specifications

Scapa 3259 Black Single-Sided Foam Tape – 3mm

Scapa 3259 is a medium hardness, closed-cell foam compression sealant with an acrylic pressure-sensitive adhesive on one side and a paper release liner on the other. Designed for sealing, cushioning, and gap filling, it provides effective water, air, and dust protection when compressed making it ideal for use on GRP kiosk doors and access panels.

Specification:

- Type: Closed-cell foam compression sealant
- Colour: Black
- Thickness: 3 mm
- Adhesive: High-quality acrylic pressure-sensitive (one side)
- Liner: White paper release liner (non-adhesive side)
- Service Temperature: -30°C to +70°C
- Application Temperature: +10°C to +40°C
- Compression Requirement: Minimum 30% for water seal
- Shelf Life: 1 year from dispatch

Key Benefits:

- Provides water, air, and dust sealing when compressed
- Medium hardness foam with properties similar to Neoprene
- Excellent resistance to abrasion, corrosion, UV light, dilute acids, and alkalis
- Clean edge finish for neat application
- Suitable for both indoor and outdoor environments
- Reduces rattling and vibration, improving insulation performance

ZOO ZHSS232 Stainless Steel Door Hinge

The ZOO ZHSS232 is a premium stainless steel hinge designed for long-lasting performance in GRP kiosk applications. Made from Grade 201 stainless steel, it offers corrosion resistance and smooth door operation. Available in a wide range of finishes to complement different kiosk designs.

Specification:

- Dimensions: 76 × 50 × 2 mm
- Material: Grade 201 stainless steel
- Corner Type: Square
- Available Finishes:
 - Satin Stainless (ZHSS232S)
 - Polished Stainless (ZHSS232P)
 - Matt Black (ZHSS232-MB)
 - Powder Coat White (ZHSS232-PCW)
 - PVD Satin Brass (ZHSS232-PVDSB)
 - PVD Polished Brass (ZHSS232PVD)
 - PVD Bronze (ZHSS232-PVDBZ)
 - Tuscan Rose Gold (ZHSS232-TRG)
 - Favo Satin Brass (ZHSS232-FSB)
 - Etna Bronze (ZHSS232-ETB)

Key Benefits:

- Corrosion-resistant Grade 201 stainless steel construction
- Smooth hinge operation for easy door use
- Multiple finishes for aesthetic flexibility
- Strong and durable for long-term service
- Designed to fit GRP kiosk doors securely and reliably

Specifications

300gsm Chopped Strand Mat – M705

A medium fibre, multi-chop length mat bonded with an emulsion binder for hand lay-up GRP applications. Designed for optimal conformability and resin compatibility, it ensures strong, uniform lamination in GRP kiosk manufacturing. The Advantex® glass composition offers enhanced corrosion resistance and improved long-term durability compared to standard E-glass.

Specification:

- Nominal Weight: 300 g/m²
- Binder Type: Emulsion
- Glass Type: Advantex® glass
- Compatible Resins: Unsaturated polyester
- Roll Widths Available: 95 cm, 104 cm, 125 cm
- Certifications: Lloyd's Register of Shipping, Det Norske Veritas
- Storage: 10–35°C, RH 35–85%, in original packaging
- Shelf Life: No known expiry; retest after 3 years for optimum performance

Key Benefits:

- Quick wetting and rapid air release, improving production efficiency
- Slower impregnation rate reduces resin use, increasing glass content and strength
- High conformability, suitable for complex mould shapes
- Certified for marine and industrial-grade use
- Superior corrosion resistance, extending kiosk life span

450gsm Chopped Strand Mat – M705

A high-weight fibreglass mat made from Advantex® glass fibres, chopped to multiple lengths and bonded with an emulsion binder. Designed for structural reinforcement, it offers superior handling properties, excellent corrosion resistance, and the strength required for large or load-bearing GRP kiosk panels.

Specification:


- Nominal Weight: 450 g/m²
- Binder Type: Emulsion
- Glass Type: Advantex® glass
- Compatible Resins: Unsaturated polyester
- Roll Widths: 95 cm, 104 cm, 125 cm
- Certifications: Lloyd's Register of Shipping, Det Norske Veritas
- Storage: 10–35°C, RH 35–85%, in original packaging
- Shelf Life: No fixed expiry; retest after 3 years for optimum performance

Key Benefits:


- Increased structural strength for heavy-duty GRP applications
- Slower impregnation rate reduces resin use and increases glass content
- High conformability for moulding complex kiosk designs
- Superior corrosion resistance, extending service life
- Certified for marine and industrial-grade installations
- Consistent quality and performance under varying conditions

Specifications


Front View

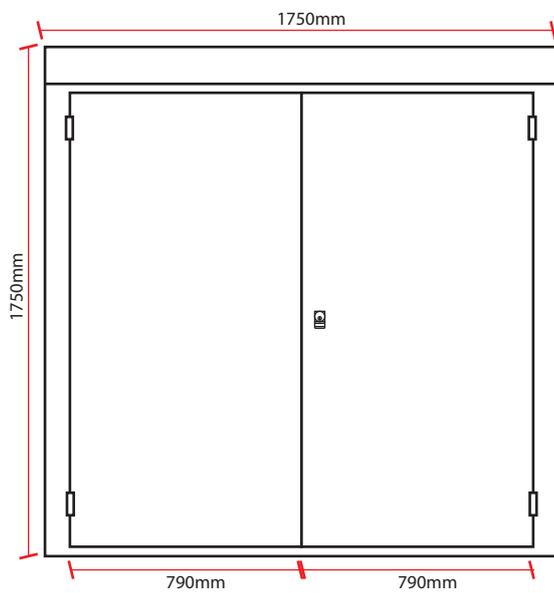

Top View

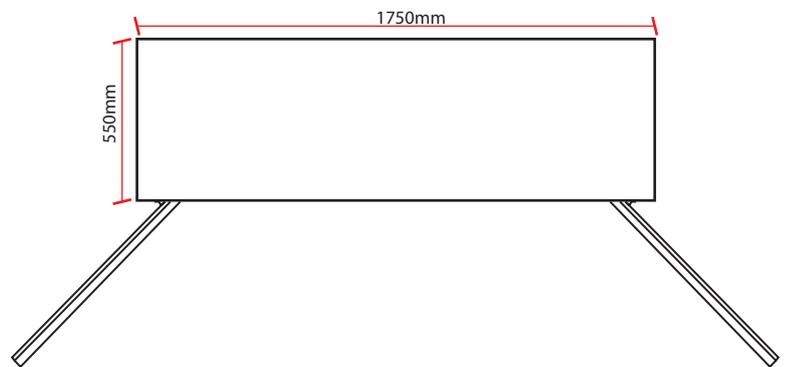

Side View

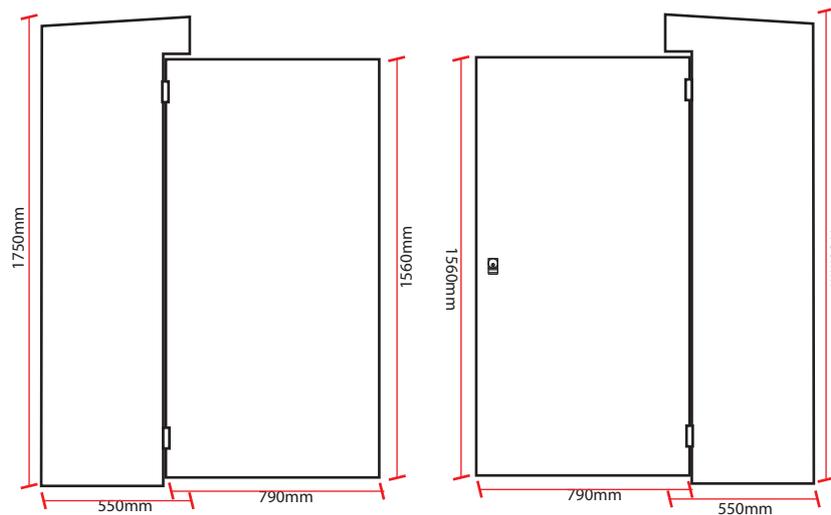

Specifications

600gsm Chopped Strand Mat – M705

The 600gsm M705 Chopped Strand Mat is a high-weight fibreglass reinforcement designed for maximum structural strength in GRP fabrication. It is made from multi-chop length Advantex® glass fibres bonded with an emulsion binder, offering superior conformability, excellent corrosion resistance, and certified performance for industrial and marine applications.

Specification:

- Nominal Weight: 600 g/m²
- Binder Type: Emulsion
- Glass Type: Advantex® glass
- Roll Widths: 95 cm, 104 cm, 125 cm
- Compatible Resins: Unsaturated polyester
- Certifications: Lloyd's Register of Shipping, Det Norske Veritas
- Storage Conditions: 10–35°C, RH 35–85%, in original packaging
- Shelf Life: No fixed expiry; retesting advised after 3 years for optimum performance

Key Benefits:

- Maximum reinforcement strength for heavy-duty GRP components
- Slower impregnation speed reduces resin use and increases glass ratio
- Excellent conformability for moulding complex kiosk structures
- Enhanced corrosion resistance for extended service life
- Certified for demanding marine and industrial applications

3.6mm Chinese Eucalyptus Face Poplar Core External Grade Plywood

A lightweight plywood sheet featuring a eucalyptus face veneer and poplar core, designed for internal lining applications in GRP kiosks. It offers a smooth, paintable finish and is suitable for use in humid interior or covered exterior environments.

Specification:

- Size: 2440 × 1220 mm
- Thickness: 3.6 mm
- Weight: 6.6 kg
- Grade: B/BB
- Standard: CE4
- Class: BS-EN636 Class 2 (humid interior/covered exterior)
- Number of Layers: 3
- Finish: Smooth sanded veneer, light reddish colour
- Edging: Square
- Fire Rating: None
- Formaldehyde Level: E1 (low)
- Moisture Resistance: No
- Wood Species: Poplar core
- Country of Origin: China
- Environmental Certification: Legally sourced

Key Benefits:

- Lightweight and easy to handle
- Smooth paintable surface
- Certified for structural use in humid and covered environments
- Low formaldehyde emissions for improved indoor air quality
- Produced from legally sourced timber